



The safest way to move trailers around the lot

25,000lb of push/pull power 1,000lb of front lifting capacity 3,000lb Center Lift capacity









Power Mover 7900 41-007900

Precise positioning (from seamless variable-speed adjustments positioning)

Removes bounce that damages trailer and tongue jacks

Perfect for all known types Fifth Wheel, Gooseneck and Travel Trailers


Ergonomic handle features forward / reverse controls


Includes both a 2" and 2-5/16"
Hitch Ball

Exclusively availabe direct from the factory





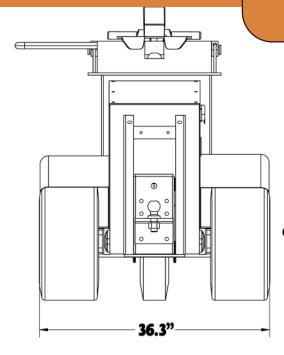

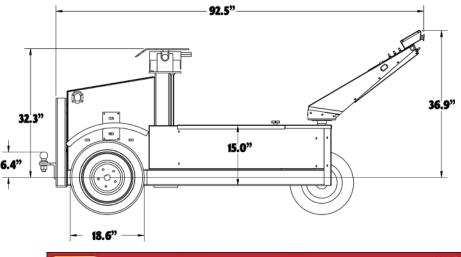

- Quad 12 VDC 140 AH batteries
- Integrated charger and level indicator
- 2 HP continuousdrive motor
- Speed up to 1.6
 MPH
- Weight: 1,200lb

Comparison



Better Positioning Better control for positioning on lot, in showroom, etc.

Power Mover =

Protects Traillers
Improved control
reduces potential for
damage.

Protect Jacks: Eliminates bouncing to eliminate tongue jack damage. Positioning Challenger Size of forklift makes it difficult to position trailer in tight spaces.

Danger Bulk of forklift and difficulty to see around trailer makes damage more likely.

Damages Jacks: Most common reason for jack replacements is bouncing from moving trailers with forklift.





The safest way to move trailers around the lot



15,000lb of push/pull power! 1,000lb front lifting capacity

Power Mover 5900 41-005905



Precise positioning (from seamless variable-speed adjustments positioning)

Removes bounce that damages trailer and tongue iacks

Perfect for all known types of travel trailers


Ergonomic handle features forward / reverse controls

Includes both a 2" and 2-5/16" Ballplate

Exclusively availabe direct from the factory





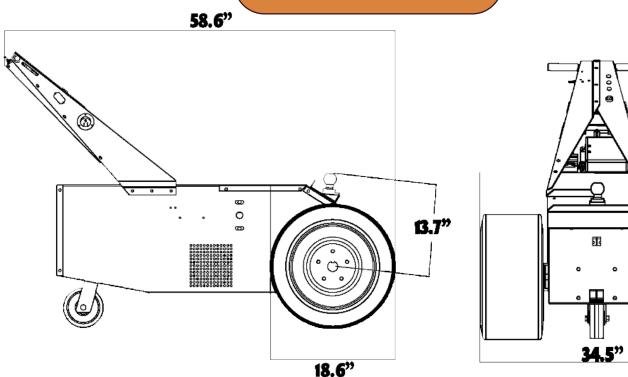

- Dual batteries (12VDC, 140AH) with integrated charger and level indicator
- 2HP continuous-drive motor can operate at 1.6MPH.
- 9½" x 18" pneumatic drive tires and rear steer tire.
- Fixed ball mount is standard at 23" off the floor.
- Weight: 1,000lbs.







Add on for Model 5900

Replacement for Model 7900

Foam Filled



Tire (Upgrade Only) Two Tires

41-500125 Foam Filled Tire (Single Tire)

Puncture-Proof Tire.
Solid foam-filled core
eliminates flats caused by
nails, screws or debris.
Increases traction.
Swap directly with the
pneumatic tire on the
Power Mover model 5900.
18" tall x 9.5" wide.

41-940439 Horn Kit

Super loud horn emits a clear audible warning, ensuring bystanders and coworkers recognize moving equipment instantly. Engineered specifically for easy bolt-on installation to Ultra-Fab Power Mover model 5900—no custom brackets required.



Model 5900 or Model 7900



Adds pintle hook to Power Mover model 5900 for versatile towing options. Precision-machined hook bolts directly to the hydraulic lift assembly. Heat-treated steel with a corrosion-resistant finish.

Spring Caster (Heavy Duty) 41-500110



Model 5900 or Model 7900



41-810050 Strobe Light & Horn Safety Package

Bright amber strobe light draws attention to the Power Mover's presence to prevent collisions and accidents. **Built-in horn** emits a clear audible warning. **Engineered** specifically for easy bolt-on installation to **Power Mover** model 5900—no custom brackets required.

Upgrade your Power Mover for peak performance





- Add on for Model 5900
- Included on Model 7900

Hydraulic Lift 41-800125

Raise or lower hitch ball while never having to leave the controls of the power mover. Includes both 2" and 2-5/16" hitch balls. Adjust hitch height from 9"-13" with a 7" stroke for flexible trailer hookup. When mounted in the low position, lift from 9"-16". Mounted high, lift from 13"-20". Engineered exclusively for the Power Mover model 5900.





Take your Power Mover to the next level