



57985 State Road 19, South
Elkhart, Indiana 46517
PH: (800) 860-7571
FX: (800) 860-4980
www.ultra-fab.com

MEGAHITCH LOCK COUPLER VAULT PRO

Combo Kit – 35-946510

2" Ball-35-946520

2⁵/₁₆" Ball-35-946530

US PATENT 8,556,288 B1

INSTALLATION & ADJUSTMENT INSTRUCTION

IMPORTANT: The MegaHitch comes with two keys. It is highly recommended that you keep one key in a safe place in case the other key is lost or damaged.

REGISTER your VAULT & KEY serial numbers on our website. www.ultra-fab.com today!

SERIAL NUMBERS:

VAULT _____

KEY _____



The preassembled configuration is not necessarily the one you will use. A shorter Bolt and companion Security Collar are also included to allow for multiple coupler configurations. The Coupler Vault Pro is designed to be universal and fit **MOST** trailer couplers.


*The Security Collar is designed to fit loosely over the threaded Bolt to prevent any cutting device from gaining a 'grip'.

Your new MegaHitch Coupler Vault Pro comes preassembled and includes:

- 2 Keys
- 1 Bolt (2 Bolts in Combo Kit)
- 1 Security Collar* (2 Collars in Combo Kit)
- Washer
- Hex Nut
- Threaded Hitch Ball (2 Balls in Combo Kit) to replace your tow ball during storage.



CAUTION: The Threaded Hitch Ball should NEVER be used during towing!

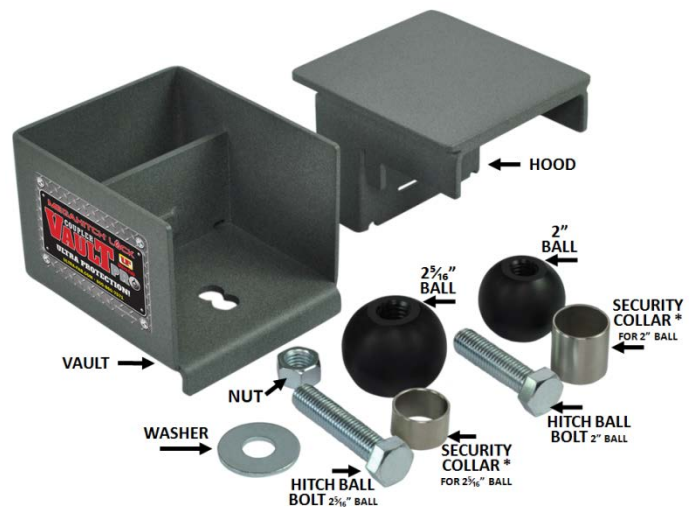



57985 State Road 19, South
Elkhart, Indiana 46517
PH: (800) 860-7571
FX: (800) 860-4980
www.ultra-fab.com

MEGAHITCH LOCK COUPLER VAULT PRO

Combo Kit – 35-946510

2" Ball-35-946520

2⁵/₁₆" Ball-35-946530

US PATENT 8,556,288 B1

STEP 1 Using the cylindrical key, unlock the Coupler Vault Pro and remove the hood.



STEP 2 Unlatch your trailer's coupler and align the Coupler Vault Pro's ball with your coupler's ball socket. Replace the Coupler Vault Pro's hood. Depending on your style of coupler, it is important to position it as deep in the Coupler Vault Pro as possible. Typical placement for a 2" ball is forward in the "figure 8" and a 2-5/16" ball at the rear. When properly adjusted, the hood should fit snugly into the recession on the lid. NOTE: Proper adjustment may require raising or lowering the Threaded Hitch Ball. In some cases, it may be necessary to switch to the alternate Bolt and/or Security Collar (if the Combo Kit has been purchased).



STEP 3 Once the top of the Threaded Hitch Ball rests against the Coupler Vault Pro's hood with zero clearance, again remove the hood. Then lock the coupler latch just as you would when hooked to a tow vehicle.



STEP 4

Replace the hood and lock the Coupler Vault Pro in place. Your trailer is now secure. In most instances, there will be a slight tilt of the Coupler Vault Pro. This was intended to add a second level of security by eliminating leverage against prying, as well as allowing more versatility for a universal fit with no sacrifice to security.



If you have difficulties with installation or have questions, please contact us so we can assist you.
(800) 860-7571 customerservice@ultra-fab.com



Ultra-Fab Products, Inc.

ONE-YEAR LIMITED WARRANTY

MEGAHITCH LOCK COUPLER VAULT PRO

THE MANUFACTURER NAMED BELOW MAKES THE FOLLOWING WARRANTY WITH RESPECT TO THE ABOVE ULTRA-FAB PRODUCTS

1. This Warranty is made only to the first Purchaser (hereinafter called the "Original Purchaser") who acquires this product for their own use.
2. This Warranty will be in effect for one year from the date of purchase by the Original Purchaser. It is suggested that the Original Purchaser retain a copy of the dated bill of sale as proof of the date of purchase.
3. This Warranty covers only specified parts which shall be free from defects in material and workmanship under normal use. This Warranty does not cover conditions unrelated to the material and workmanship of the product. Such unrelated conditions include, but are not limited to (a) faulty installation and any damage resulting from such; (b) the need for normal maintenance and any damage resulting from the failure to provide such maintenance; (c) failure to follow Manufacturer's instructions for use of this product, and (d) any accident to, or misuse of, any part of this product and any alteration by anyone other than the Manufacturer or its authorized representative.
4. In order to obtain the benefits of this Warranty, you should return the product which you find defective to the Manufacturer named below during the period that this Warranty is in effect. All charges incurred in delivery of the product to the Manufacturer, and in picking it up after the Warranty service has been completed, must be paid by the Original Purchaser.
5. Any item returned in the manner described in paragraph 4 will be examined by the Manufacturer. If it is found that the returned item was defective in material or workmanship, the Manufacturer will repair it without charge for material and labor.
6. Ultra-Fab will pay freight on replacement parts during the first 90 days of ownership by the Original Purchaser.
7. The Manufacturer does not authorize any person or company to create any Warranty obligation or liability on their behalf.
8. IN NO EVENT SHALL THE MANUFACTURER BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.
9. ANY IMPLIED WARRANTY, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR ANY PURPOSE, IS LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.
10. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

Ultra-Fab Products, Inc.

57985 SR 19 S., Elkhart, IN 46517

Tel: (574) 294-7571 Fax: (574) 294-4980

www.ultra-fab.com