



57985 State Road 19, South
Elkhart, Indiana 46517
PH: (800) 860-7571
FX: (800) 860-4980
www.ultra-fab.com

ADJUSTABLE KING PIN TRIPOD STABILIZER
UF# 19-950600

Thank you for purchasing the **Adjustable King Pin Tripod (PN 19-950600)**. It was a wise purchase, and we are sure it will provide you with many years of service.

! SAFETY WARNINGS !

This tripod is **NOT** a jack. It is **NOT** made to replace the landing gear on your 5th wheel trailer. This tripod is a stabilizer designed to reduce or eliminate the vibrations and motion that travel through the frame. **Do NOT** place your hands or fingers in areas that could cause pinching.


Assembly Instructions

The tripod hardware has been preassembled for your convenience. It is recommended to snug the nuts prior to placing the tripod on the king pin to provide better stability. Do not tighten completely. Allow the legs and arms to move freely so that the tripod can open while being placed in use and can collapse upon removal from the king pin for easy storage. You will need to attach the footpads - clip assembly supplied - and the chain.

How to Use

To use your tripod:

- 1) Spread all three legs so the arms are parallel to the ground.
- 2) Position the tripod under the trailer kingpin.
- 3) With the cup fully screwed into the leg bracket nut, pull out each telescoping leg equally so the cup is approximately 6" to 8" below the kingpin. Insure that the Quick Latches are fully engaged in the holes.
- 4) Pull the chain up to lift the cup (1) up over the king pin.
- 5) Hook the chain link over the pin welded to the leg bracket (2).
- 6) Turn the handle of the cup counter clockwise until the cup is snug against the king pin.
- 7) Two or three additional turns are normally sufficient for stabilization.
- 8) Your tripod is adjustable from 33" to 62".
- 9) Your tripod will support and stabilize up to 1,200 pounds.

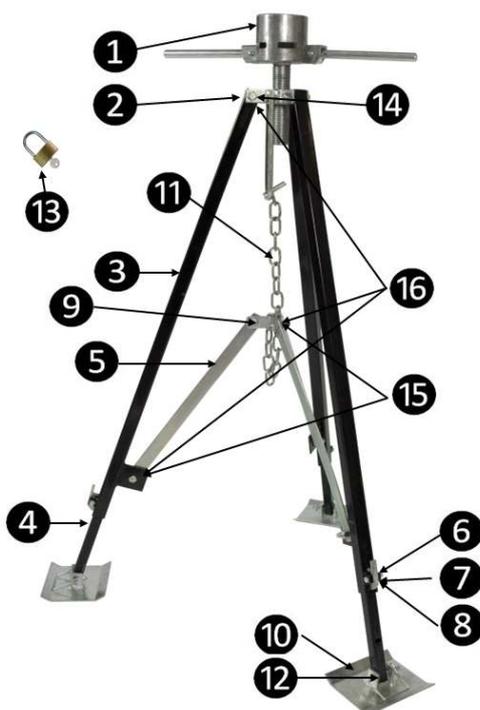

ILLUS. #	PART #	DESCRIPTION	QTY REQ
1	19-001056	KING PIN CUP ASSEMBLY	1
2	19-001055	LEG BRACKET	1
3	19-001090	OUTER LEG	3
4	19-001091	INNER LEG	3
5	19-001072	ARM	3
6	19-001092	PIN FOR QUICK LATCH	3
7	19-001093	SPRING FOR QUICK LATCH	3
8	19-001094	QUICK LATCH	3
9	19-001053	CONNECTING BRACKET	1
10	19-001073	FOOTPAD	3
11	19-001054	CHAIN	1
12	38-141023	CLIP ASSEMBLY	3
13	19-001022	PADLOCK & KEYS	1
14	19-001020	BOLT- 3/8-16 x 2" HEX	3
15	19-001018	BOLT- 3/8-16 x 1" HEX	6

To lock: Place the lock (9) through the two holes in cup and lock. The neck of the lock has enough interference in the cup so that the king pin cannot be removed. **Your tripod is now stable and secure.**